

BC-2824-6

180 lb WLL

LOW PROFILE OFFSET BEAM CLAMP

BeamWare®



Beam Clamp & Isolator Supporting a Grid

BEAM CLAMP

Standard, pre-engineered channel style beam clamps anchor to a building's structure and offer a safe and predictable method of rigging grids and other objects from overhead. This hook style beam clamp is adjustable and mounts flush underneath the building's I-Beam's flange. Use the BC-2824-series hook style beam clamp to provide a load rated overhead rigging point from structural I-Beams with widths ranging between 2" and 6", 6" and 9" or 9" and 12".

This beam clamp model provides a fast, easy and safe way to rig direct loads, bridles and hitches from overhead and a hand wrench is all that is required to secure this clamp. The beam flanges must be parallel to the floor.



I-Beam Clamp with Sound Isolator



KEY FEATURES:

- ▶ For beam flange widths between 2" and 6"
- ▶ Accommodates 1/2 - 13 threaded rod.
- ▶ For overhead vertical suspension applications.

OPTIONAL ACCESSORIES:

- ▶ See Threaded Rod [ROD-500-XXX](#)
- ▶ See Strut Accessories Datasheet
- ▶ See Sound Isolation [CG-SH-1-245-IH](#)

SPECIFICATIONS:

Material: Structural Steel
Grade B7 Threaded Rod

Finish: Bright Zinc

Color: Silver

Design Factor: 7:1

WLL: 178.5 lbs / 81.1 Kg

Shipping Weight: 1.25 lbs / .57 Kg

PACKAGE CONTENTS:

1 pc Beam Clamp


6 pcs Hex Nut, 1/2-13

1 pc 12" All Threaded Rod




Rated for indoor use.

Front View

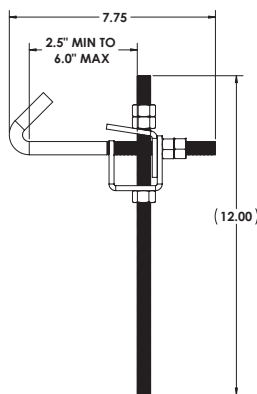

Side View

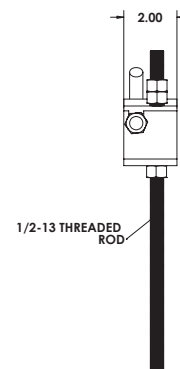

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.