


CG-P1377-JBX2

252 lb. WLL

CHANNEL STRUT JOINER BRACKET EXTENDED

STRUTWARE™

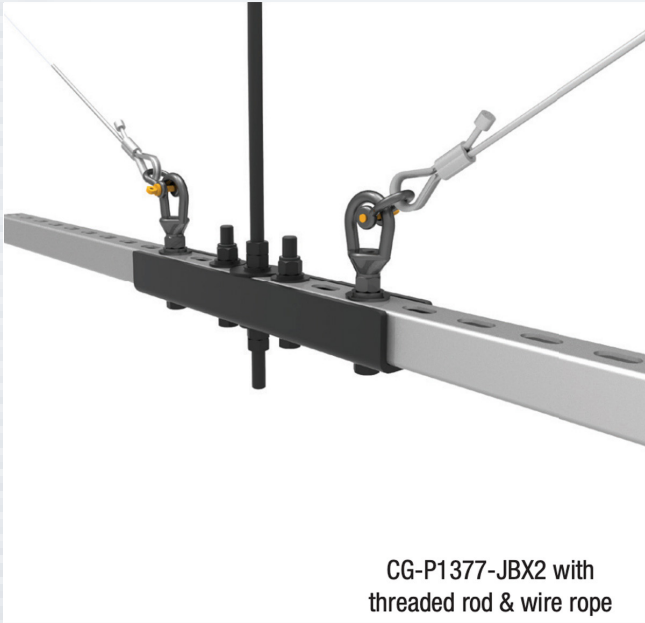

CG-P1377-JBX2 with threaded rod & wire rope

The CG-P1377-JBX2 safely joins strut channels together in order to support overhead speaker grid systems. This joiner bracket can be supported with wire rope assemblies to secure heavier loads and to ensure an extra margin of safety, especially in earthquake regions.



CG-P1377-JBX2 with wire rope



CG-P1377-JBX2 with threaded rod



KEY FEATURES:

- ▶ Safe and load rated
- ▶ Allows multiple strut sections to be secured together

OPTIONAL ACCESSORIES:

- ▶ See Threaded Rod Datasheet
- ▶ See Wire Rope Tensioner Datasheet

SPECIFICATIONS:

Materials: Structural Steel
Finish: Black Zinc
Color: Black
WLL: 252 lbs / 114.5 kg
Design Factor: 7:1
Shipping Weight: 6.75 lbs / 3.1 Kg.


*WLL = Working Load Limit

PACKAGE CONTENTS:


1 pcs: Joiner Bracket
4 pcs: 1/2-13 Hex Bolt x 3 1/2" Long
4 pcs: Flat Washers, 1/2"
4 pcs: 1/2-13 Nyloc Hex Nuts
10 pcs: Sound isolation washer
1 pc: Fender Washer, 1/2"
4 pcs: Hex Nut, 1/2-13



Rated for indoor use.

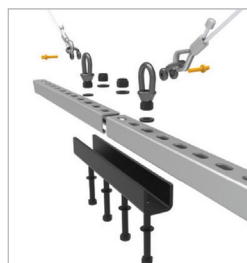

CG-P1377-JBX2 with wire rope

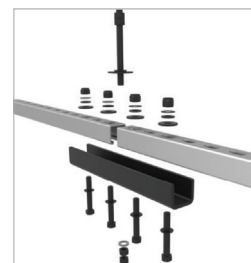


CG-P1377-JBX2 with threaded rod




CG-P1377-JBX2 with threaded rod

BC-LAM-KIT Dimensions


Extender Bracket




Top View

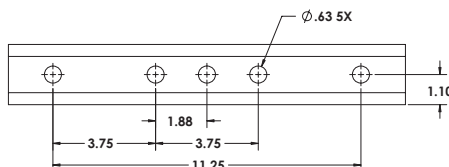

Side View



Front View



Adaptive Technologies Group
 1635 E. Burnett Street | Signal Hill, CA 90755 USA
 Ph: 562.424.1100 | Fax: 562.424.3520
 www.adaptivetechgroup.com



ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.