MM-022-BT

75 lb WLL

PAN & TILT SPEAKER WALL MOUNT

MULTIMOUNT®

The universal MultiMount™ speaker mount supports loudspeakers weighing up to 75 lbs./34.1 kg, quickly attaching them to walls, ceilings, overhangs, and other structural sur faces. Speakers can be aimed and locked in almost any direction or angle through the use of independent pan, tilt, and clockwise adjustments.

The MM-022-BT orients speakers horizontally or vertically depending on how it is assembled using standard speaker mounting hole patterns.

The MM-022-BT's unique telescoping arm acts as a convenient carrying handle to lift speakers into place then inserts into the wall mounting plate. Once inserted, the mounting plate supports the weight of the speaker leaving the installers hands free to complete the wiring and positioning process.

STANDARD FEATURES:

- Independent, no drift, pan and tilt controls
- Infinite locking adjustments
- Vertical or Horizontal Orientation
- Single man speaker installations
- Optional safety cables available
- Accommodates multiple mounting hole patterns including 2 x 4-1/4 and 2-3/4 x 5

OPTIONAL ACCESSORIES:

- PoleStar™ PM-010 pole adapter
- Safety cables (standard and custom lengths)

SPECIFICATIONS:

Material: Structural Steel Alloy
Finish: Powder Coat
Color: Black
Tilt Rotation: 120° max.
Swivel Rotation: 140° max.
WLL: 75 lbs. (34.1 Kg) max.
Design Factor: 5:1 ratio
Net WGT: 4 lbs. (1.8 Kg) each
Shipping WGT: 5 lbs. (2.3 Kg) each
Pack Count: 1 units/carton

PACKAGE CONTENTS:

1 pc Mounting Plate
1 pc Speaker Adapter with Tab
1 pc Support Arm Assy
1 pc Hardware Kit

MADE IN USA

Rated for indoor use.

DIMENSIONS:

HORIZONTAL ORIENTATION

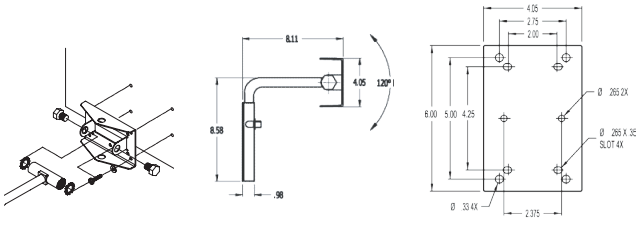

Side View **Speaker Plate**

VERTICAL ORIENTATION

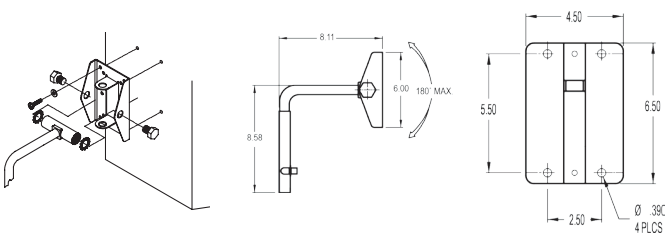

Side View **Wall Plate**

Adaptive Technologies Group
1635 E. Burnett Street | Signal Hill, CA 90755 USA
Ph: 562.424.1100 | Fax: 562.424.3520
www.adaptivetechnologiesgroup.com

ADAPTIVE TECHNOLOGIES GROUP

ALWAYS INSTALL SAFETY CABLES

WARNING: Mounting and/or suspension of equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.